

*Quality is our primary concern
for your satisfaction.*



**Specialty Screw utilizes
Optical automated sorting
machines to focus on zero
discrepancies to the customer.**

- Assurance of contaminant free product
- Precise measurements for high volume parts prior to introduction into production

**Other Inspection Methods
include:**

- SPC
- Hardness Testing
- Optical Comparator
- Salt Spray Test Cabinet
- Automotive PPAP

Certifications

- A2LA laboratory accreditation
- ISO9001:2008
- TS16949:2009



Specialty Screw Corp

2801 Huffman Blvd
Rockford, IL 61103-3997
Phone: 815-969-4100
FAX: 815-964-2300



www.specialtyscrew.com

Specialty Screw CORP.



**Cold Headed Fasteners
and
Engineered Components**

Phone: 815-969-4100
www.specialtyscrew.com

Cold Forming

Specialty Screw Corporation manufactures standard and metric: special fasteners, special screws, and special bolts to customer requirements using cold formed technology.

Benefits

Cold forming vs the standard CNC machining allows for:

- Elimination of material waste.
- Provides products with greater strength, reliability and durability.



Size Range

Inch:


Diameter: #6 (.138) to 3/4"

Length: 3/8" to 5-1/2"

Metric:

Diameter: 3.5mm to 19mm

Length: 10mm to 140mm

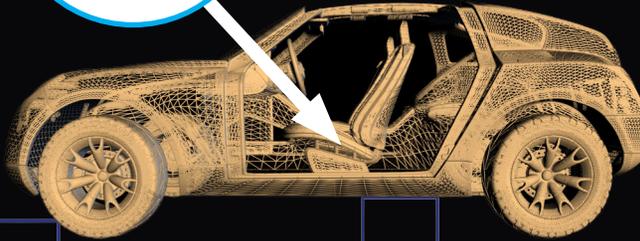

Specialty Screw Corporation also offers complete in-house secondary capabilities including:

Trimming
Shaving
Drilling/Tapping
Roll Threading
Roll Forming
Slotting

Pointing
Milling
Flattening
Inspection
Sorting



Industries Served

- Automotive
- Firearms
- Hand Tools
- Building Hardware Parts
- Electrical Storage
- Recreational Equipment
- Infrastructure
- Furniture

Product Types

- Bull Studs
- Shoulder & Collar Bolts
- Isolator & Valve Cover Bolts
- Double End Collar Studs
- Thread Forming Screws
- Precision Rivets
- Cold Formed Parts & Products
- Six-lobe Recess Drives
- Special Pins
- Synergistic Assemblies

MAThread

Specialty Screw Corporation has a license to manufacture the MAThread® and MATpoint®. MAThread® is a self aligning feature that is incorporated into the lead-in point and starting threads of the fastener.